

Acceleration Operators in the Value Iteration Algorithms for Markov Decision Processes

Oleksandr Shlakhter¹, Chi-Guhn Lee^{1,2}, Dmitry Khmelev³, Nasser Jaber¹

¹Department of Mechanical and Industrial Engineering

³Department of Mathematics

University of Toronto, Toronto, Ontario, Canada, M5S 3G8

March 27, 2008

²Corresponding author can be reached at cglee@mie.utoronto.ca

³Passed away in 2004 while our research was in progress

Abstract

We study the general approach to accelerating the convergence of the most widely used solution method of Markov decision processes with the total expected discounted reward. Inspired by the monotone behavior of the contraction mappings in the feasible set of the linear programming problem equivalent to the MDP, we establish a class of operators that can be used in combination with a contraction mapping operator in the standard value iteration algorithm and its variants. We then propose two such operators, which can be easily implemented as part of the value iteration algorithm and its variants. Numerical studies show that the computational savings can be significant especially when the discount factor approaches 1 and the transition probability matrix becomes dense, in which the standard value iteration algorithm and its variants suffer from slow convergence.

Keywords: Markov decision processes, value iteration, accelerated convergence, linear programming.

1 Introduction

Consider an infinite horizon Markov decision process (MDP) with a finite set of i states denoted by S , a finite set of actions $A(i)$ for each state $i \in S$, an immediate reward $r(i, a)$ for each $i \in S$ and $a \in A = \cup_{i \in S} A(i)$, and a transition probability $p_{ij}(a)$ for each $i, j \in S$ and $a \in A(i)$. The objective is to determine v_i , the maximum expected total discounted reward over an infinite horizon starting in state i , where λ is the discount factor ($0 \leq \lambda < 1$). It is well known [7] that v satisfies the optimality equation

$$v_i = \max_{a \in A(i)} \left\{ r(i, a) + \lambda \sum_{j \in S} p_{ij}(a) v_j \right\}, \quad (1)$$

and the actions attaining the maximum in Equation (1) give rise to an optimal stationary policy. Let U denote the set of bounded real valued functions on S with the norm $\|v\| = \max_{i \in S} |v_i|$, and let the function $d : S \rightarrow A(s)$ specifies the action choice for state $i \in S$ (i.e., $d(i) \in A(i)$ for each $i \in S$). Furthermore, let r_d denote the $|S|$ -vector, with i -th component $r_d(i) \equiv r(i, d(i))$, and P_d the $|S| \times |S|$ matrix with (i, j) -th entry given by $p_d(j|i) \equiv p_{ij}(d(i))$. Then the optimality equation given in Equation (1) can be written, with the definition of the operator T on U , in the following vector notation:

$$v = Tv \equiv \max_{d \in \Pi} \{r_d + \lambda P_d v\}, \quad (2)$$

where Π is the set of policies.

There are several standard methods for finding optimal or approximately optimal policies for the MDP. Approaches widely employed to solve MDP problems include value iteration and policy iteration [7]. Although simple to implement, these approaches are nevertheless

limited in the size of problems that can be solved due to the excessive computation required to find close-to-optimal solutions. Techniques to improve the convergence of the value iteration algorithm have been studied in [5, 4], just to name a few. The standard value iteration algorithm is summarized as follows [7]

Value Iteration (VI) Algorithm

Step 0 Select $v^0 \in \mathbb{R}^I$, set $n = 0$, and specify $\varepsilon > 0$.

Step 1 Compute $v_i^{n+1} = Tv_i^n$ for all $i \in S$.

Step 2 If $\|v^{n+1} - v^n\| < \varepsilon(1-\lambda)/2\lambda$, go to **Step 3**. Otherwise, increase n by 1 and return to **Step 1**.

Step 3 Return with the actions attaining the maximum in **Step 1**.

An alternative approach is based on linear programming. Although linear programming-based approaches are generally dismissed as inefficient [7], they have recently inspired the research community to find new approaches using the well-studied theory of linear programming. Widely employed linear programming formulations [2, 7, 9] are due to Derman [3] as given below:

$$\min \left\{ \sum_i v_i \mid v_i - \lambda \sum_j p_{ij}(a)v_j \geq r(i, a), \forall i \in S, \forall a \in A(i), v \in \mathbb{R}^{|S|} \right\}. \quad (3)$$

Notice that the LP is a minimization problem as opposed to the given MDP being a maximization problem. This is due to the implementation of the contraction mapping as constraints of the LP.

One of the recent methods rooted in the above linear programming formulation is an approximation approach using basis functions [2]. They use a linear combination of pre-

selected basis functions to fit the value function of MDP to obtain an approximate value function, which is then optimized in the feasible set of the linear program – named the approximate linear program. While the quality of the approximation heavily depends on the pre-selected basis functions, they fail to provide reliable guidelines on how to choose basis functions. The feasible set V of the equivalent linear program can be written in vector notation as follows:

$$V = \{v \in \mathbb{R}^{|S|} \mid v \geq Tv\}. \quad (4)$$

We propose a new class of operators that can be integrated into the standard and variants of the value iteration algorithm for Markov decision processes so as to speed up the convergence of the iterative search. The speed of convergence will be measured in both the number of iterations and the CPU time. The characterization of the operator class is motivated by the monotone behavior of contraction mappings in set V and the ideas of the basis function approximation. The major contribution of this paper is the identification of a new class of operators which accelerate the value iteration algorithm and its variants. The observation of monotone behavior of the contraction mapping in set V in Equation (4) would also inspire the research community to explore other types of operators.

The rest of the paper is organized as follows. Section 2 introduces conditions which need to be satisfied by accelerating operators, that are to be combined with value iteration operators. Section 3 presents the performance improvements due to the acceleration as well as a discussion on computational complexity of the acceleration operators. In section 4 we discuss the application of the acceleration operators to the expected total reward, semi-

Markov and continuous-time Markov decision processes. Finally, section 5 concludes the paper.

2 Accelerated Value Iterations Algorithms

In this section we will introduce a class of operators that will speed up the convergence of the standard value iteration and its variants. Operators in this class can be used in combination with the contraction mapping of the value iteration algorithm and its variants. We will also present two such operators later in this section.

The most crucial observation, that leads to characterization of the acceleration operators, is that the operator T is a component-wise monotone mapping in V and the set V is invariant under T as formally stated in Lemma 2.1.

Lemma 2.1. *V is invariant under T . That is, $TV \subset V$.*

It is also known [7] that the optimal solution v^* of the MDP or the fixed point of the operator T given in (2) is such that

$$v^* \leq v, \forall v \in V.$$

Lemma 2.1 suggests the following conditions for acceleration operator Z on the set V .

Acceleration Conditions

(A) $ZV \subset V$,

(B) $Zv \leq v, \forall v \in V$.

One can see that the identity operator and the operator T satisfy both of the conditions. For a given operator satisfying two conditions **(A)** and **(B)**, an accelerated value iteration algorithm can be defined. Below is a summary of the Generalized Accelerated Value Iteration Algorithm (GAVI) proposed in the present paper.

General Accelerated Value Iteration Algorithm (GAVI)

Step 0 Select $w^0 \in V$, set $n = 0$, and specify $\varepsilon > 0$.

Step 1 Compute $w_i^{n+1} = ZTw_i^n$ for all $i \in S$.

Step 2 If $\|Tw^n - w^n\| \leq \varepsilon(1 - \lambda)/2\lambda$, go to **Step 3**. Otherwise increase n by 1 and return to **Step 1**.

Step 3 Return with the actions attaining the maximum in **Step 1**.

Notice that different acceleration operators may be used in different iterations of the value iteration algorithm, in which case Z_n is an acceleration operator used in Step 1 of n -th iteration, instead of Z . In this paper we restrict our attention to the case where $Z_n = Z$ for all n .

Remark 2.1. GAVI must be initialized with $w^0 \in V$. It is shown in [8] that there always exists a feasible solution $u(\in V)$ of the equivalent LP in form $u(i) = \alpha \vec{1}$ for all i , where $\vec{1}$ is a vector of ones. Indeed, taking $\alpha = (1/(1 - \lambda)) \max_{i \in S, a \in A(i)} r(i, a)$, we will have u be a feasible solution of the above LP.

Remark 2.2. It is easy to show that if v^* is the fixed point of operator T , $v^{n+1} = Tv^n$, and $w^0 = v^0$. Then

- (i) $v^* \leq w^n \leq v^n$,
- (ii) $v^* = \lim_{n \rightarrow \infty} w^n = \lim_{n \rightarrow \infty} v^n$,

- (iii) $\|v^* - w^n\| \leq \|v^* - v^n\|$.
- (iv) The sequence $\{w^n\}$ converges globally on V (for all $w^0 \in V$) with order 1 at a rate less than or equal to λ ; its global asymptotic average rate of convergence is less than or equal to λ^1 .

As mentioned earlier, T itself is such an operator, resulting in an algorithm that performs **Step 1** of VI twice per iteration. Trivially, such modification accelerates the convergence of the algorithm but each iteration is twice as expensive as VI. Therefore, it is important to identify an acceleration operator satisfying two conditions **(A)** and **(B)** that requires little additional computation, so that the reduction in the number of iterations before convergence is more dramatic than the increased computation per iteration. If the condition **(B)** holds strictly, the improvement per iteration is guaranteed to be more than that of the standard value iteration (VI).

Now we propose an acceleration operator that requires little additional computation per iteration but reduces the number of iterations significantly. Understanding that the value iteration algorithm is simply finding a component-wise minimum point in the set V , any operator that maps a given point (vector) v in V to another vector u in V such that $u \leq v$ with the strict inequality with at least one component will accelerate the convergence.

Projective Operator

For $v \in V$, $Z : v \rightarrow \alpha^*v$, where α^* is the optimal solution of the following optimization

¹An extensive discussion of convergence orders and rates can be found in [7].

problem:

$$\min \left\{ \alpha \sum v_i \mid T(\alpha v) \leq \alpha v \right\}. \quad (5)$$

We will call GAVI with Projective Operator as Projective Accelerated Value Iteration or PAVI for short in the paper. It is interesting to view Projective Operator as an approximation approach using a basis as is proposed in [2] since the optimization problem given in (5) is nothing but the approximate LP with a single basis function v found by the standard operator T in **Step 1** of VI or GAVI. The choice of basis functions is not an issue in this approach since V is invariant under T and T is a contraction mapping. That is, T finds a vector $v \in V$ so that optimizing the approximate linear program with a single decision variable, denoted by α in the definition of Projective Operator, results in a new vector closer to the fixed point. The role of Projective Operator is graphically illustrated in Figure 1, where Z projects the given point $v \in V$ to the boundary of V .

Figure 1 goes here.

Theorem 2.1. *Projective Operator Z satisfies the conditions (A) and (B) if $r(i, a) \geq 0$ for all $i \in S$, for all $a \in A(i)$.*

Remark 2.3. The non-negativity condition is not really restrictive. The rewards can be adjusted to be non-negative for all states and actions

$$r(i, a)' = r(i, a) + \max_{j \in S, a \in A(j)} \{|r(j, a)|\}, \forall i \in S, \forall a \in A(i).$$

The new MDP shares the optimal policy with the original so that it will not matter which MDP to solve. For the expected total discounted MDP, the reward adjustment can also be considered as the coordinate translation as follows:

$$v_i' = v_i + \max_{j \in S, a \in A(j)} \{|r(j, a)|/(1 - \lambda)\}, \forall i \in S,$$

Let ∂V denote the set of the boundary points of V and $\text{int}(V)$ the set of the interior points of V , i.e., $\text{int}(V) = V \setminus \partial V$.

Lemma 2.2. *Suppose that P_d is fully dense (no zero entry) for all $d \in \Pi$, then $Tv < v$ for all $v \in V$ with $v \neq v^*$.*

Remark 2.4. Notice that if the transition probability matrix P_d is fully dense for all $d \in \Pi$, the strict inequality in (i) and (iii) of the Remark 2.2 is guaranteed, i.e. the sequence of iterates PAVI converges faster than that of VI. This is because it is always true that for all $v \in V$ with $v \neq v^*$, $Tv \in \text{int}(V)$ and Projective Operator maps $Tv \in \text{int}(V)$ to a vector $w \in \partial V$. It is obvious that $w < v$. It worth to mention, however, that strict inequalities in (i) and (iii) do not guaranty that the stopping criteria of value iteration algorithm will be satisfied strictly faster.

Lemma 2.3. *The interior of V is invariant under T . That is,*

$$T(\text{int}(V)) \subset \text{int}(V).$$

Lemma 2.3 suggests a variation of Projective Operator for which the strict inequality in (i) and (iii) of the Remark 2.2 is guaranteed, which allows the sequence of iterates PAVI to converge faster than that of VI in sense of (i) and (iii). Given a factor $\beta(0 < \beta < 1)$, one can define a variation of Projective Operator as $Z^\beta u = (1 - \beta)Zu + \beta u$, which always finds an interior point between Tw^n and $ZTw^n = w^{n+1}$ so that in the next iteration Tw^{n+1} is guaranteed to be an interior point of V .

Now we present a new acceleration operator that satisfies **Acceleration Conditions (A)** and **(B)**.

Linear Extension Operator

For $v \in V$, $Z : v \rightarrow v + \alpha^*(u - v)$, where $u = Tv$ and α^* is the optimal solution to the following optimization problem:

$$\min \left\{ \sum v_i + \alpha \sum (u_i - v_i) \mid T(v + \alpha(u - v)) \leq v + \alpha(u - v) \right\}. \quad (6)$$

Figure 2 graphically illustrates how Linear Extension Operator works. It casts Tw^n in the direction of $Tw^n - w^n$ to the boundary of set V . For $w^n \in V$, we have $Tw^n \leq w^n$, implying that $Tw^n - w^n$ is an improving direction within set V . As a result, Linear Extension Operator moves Tw^n closer to the fixed point. An improvement is guaranteed whenever $Tw^n \in \text{int}(V)$. When the transition matrix P_d is fully dense for all $d \in \Pi$, such a improvement is also guaranteed. We can also define a variation of Linear Extension Operation as we did with Projective Operator to guarantee a strict inequalities in (i) and (iii) of the Remark 2.2 even when the matrices are not fully dense.

Figure 2 goes here.

Theorem 2.2. *Linear Extension Operator Z satisfies the conditions (A) and (B).*

When Linear Extension Operator is used in **Step 1** of GAVI, we call the algorithm as Linear Extension Accelerated Value Iteration or LAVI for short in the paper.

In what follows we will combine the two acceleration operators - Projective Operator and Linear Extension Operator - with variants of the standard value iteration algorithms: Jacobi, Gauss-Seidel, and Gauss-Seidel-Jacobi value iteration algorithms.

Jacobi: $v^{n+1} = T_J v^n$ where

$$v_i^{n+1} = \max_{a \in A(i)} \left\{ \left[r(i, a) + \lambda \sum_{j \neq i} p_{ij}(a) v_j^n \right] / \left[1 - \lambda p_{ii}(a) \right] \right\}, \forall i \in S. \quad (7)$$

Gauss-Seidel: $v^{n+1} = T_{GS} v^n$ where

$$v_i^{n+1} = \max_{a \in A(i)} \left\{ r(i, a) + \lambda \sum_{j < i} p_{ij}(a) v_j^{n+1} + \lambda \sum_{j \geq i} p_{ij}(a) v_j^n \right\}, \forall i \in S. \quad (8)$$

Gauss-Seidel-Jacobi: $v^{n+1} = T_{GSJ} v^n$ where

$$v_i^{n+1} = \max_{a \in A(i)} \left\{ \left[r(i, a) + \lambda \sum_{j < i} p_{ij}(a) v_j^{n+1} + \lambda \sum_{j > i} p_{ij}(a) v_j^n \right] / \left[1 - \lambda p_{ii}(a) \right] \right\}, \forall i \in S. \quad (9)$$

Notice that the definition of the operators T_{GS} and T_{GSJ} depends on the order of state index.

We will show that these operators can be used in the position of the standard operator T in

GAVI (and hence in PAVI and in LAVI). We start with the following definition of sets:

$$V_J = \{v \in \mathbb{R}^{|S|} \mid v \geq T_J v\},$$

$$V_{GS} = \{v \in \mathbb{R}^{|S|} \mid v \geq T_{GS} v\},$$

$$V_{GSJ} = \{v \in \mathbb{R}^{|S|} \mid v \geq T_{GSJ} v\}.$$

The following lemma is an analogue of Lemma 2.1:

Lemma 2.4. *V_J , V_{GS} , and V_{GSJ} are invariant under T_J , T_{GS} , and T_{GSJ} respectively.*

With Lemma 2.4 acceleration operators satisfying conditions **(A)** and **(B)** can be used in **Step 1** of GAVI with the variants T_J , T_{GS} , and T_{GSJ} of the standard operator T . However, it is not trivial to define V_{GS} and V_{GSJ} with a set of linear inequalities and the acceleration operators proposed in this paper will not work. To avoid the problem, we should restrict the acceleration operators to a strict subset of V_{GS} and V_{GSJ} . In this paper we use V since it is a strict subset of V_{GS} and V_{GSJ} as shown in Lemma 2.5 below.

Lemma 2.5. *The following relations hold*

$$V = V_J, \quad V_{GS} = V_{GSJ}, \quad \text{and} \quad V \subset V_{GS}. \quad (10)$$

Remark 2.5. Gauss-Seidel methods require special consideration, since in general $V \neq V_{GS}$. Indeed, let's consider an MDP with two states and one action per state with a transition probability matrix $\begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix}$, and a reward vector $r = \begin{pmatrix} 1 \\ 1 \end{pmatrix}$. Then $v \geq T v$ is equivalent to $v_1 \geq 1 + \lambda v_2$, $v_2 \geq 1 + \lambda v_1$, while $v \geq T_{GS} v$ is equivalent to $v_1 \geq 1 + \lambda v_2$, $v_2 \geq 1 + \lambda(1 + \lambda v_1)$, and it is easy to see that these systems are different.

Lemma 2.6.

$$T_{GS}(V_{GS}) \subset V, \quad \text{and} \quad T_{GSJ}(V_{GSJ}) \subset V. \quad (11)$$

Theorem 2.3. *The set V is invariant under T_J , T_{GS} , and T_{GSJ} . That is,*

$$T_J V \subset V, \quad T_{GS} V \subset V, \quad T_{GSJ} V \subset V.$$

Theorem 2.3 states that V is invariant under T_J , T_{GS} , and T_{GSJ} , which suggests that these operators can replace T in GAVI to give rise to new accelerated value iteration algorithms. Therefore, we obtain 8 accelerated versions of the value iteration algorithm, which are conveniently written in the form XAY, where ‘X’ stands for either “Projective” or “Linear Extension”, ‘A’ for “Accelerated”, and ‘Y’ for one of VI, J, GS, or GSJ. For example, LAGS denotes Linear Extension ‘Accelerated Gauss-Seidel method with $w^{n+1} = ZT_{GS}$ for

Step 1. Non-accelerated versions will be shortened to VI, J, GS, and GSJ without prefixes.

Remark 2.6. There are other modifications of VI based on the splittings of transition probability matrix [7]. We believe that the strong inclusion demonstrated in Lemma 2.6 holds for the most practically useful splittings, but to avoid unnecessary complications we do not prove the statement in the most general setting.

3 Numerical Studies

3.1 Random examples

In this section we present numerical studies to demonstrate the computational improvement that the two accelerating operators achieve over the standard value iteration algorithm as

well as its variants. We will consider two families of randomly generated MDP problems. In all cases the number of actions in each state was generated using a uniform random number generator between 2 and 99 and the immediate reward for each state and action pair was generated using a uniform random number generator in the range $(1, 100)$. Transition probability matrices were generated differently between the two families. In Example 1, the transition probability matrices have non-zero elements distributed uniformly, while in Example 2, non-zero elements are only in a band around the diagonal.

In Example 1, we first fixed the number of non-zero entries in each row so that the density of non-zero entries in that row should be equal to a given density level. We randomly generated non-zero entries according to a uniform distribution over $(0,1)$, normalized these non-zero entries so that they add up to give the sum of 1, and then placed them randomly across the row. In Example 2, non-zero entries were generated and placed only around the diagonal so that the non-zero entries form a band around the diagonal in the matrix. The number of non-zero entries in each row was determined for a given density level.

We also used exponential distributions instead of uniform distributions but the numerical results did not show any noticeable differences in performance. Therefore, we only present numerical studies with uniform distributions in this paper.

In both Example 1 and 2, the density of the non-zero elements in the matrices varies between 20% and 100% and the discount factor is set to 0.9, 0.98, and 0.995. This results in 27 problem instances in each example, which are then solved using the standard value iteration algorithm and its three variants with and without our acceleration operators.

Example 1. *Consider MDPs with 500 states and up to 100 actions per state. The transition probability matrices were generated using a uniform random number generator and non-zero elements were uniformly placed in the matrix. The density of non-zero elements of the matrices varies from 20% to 100%. The discount factor is set to 0.9, 0.98, and 0.995 and the tolerance used in the stopping condition is $\varepsilon = 10^{-3}$.*

The computational results of Example 1 are presented in Table 1, where the first and the second numbers in each cell are the number of iterations and the CPU time to converge to fixed points, respectively. PAVI improves the computational efficiency measured in the CPU time up to 605 times (PAVI combined with Jacobi value iteration when the density is 50% and the discount factor is 0.995). In general, PAVI has a larger improvement than LAVI, although LAVI is better in terms of the worst case comparison. Both operators improve the computation as the discount factor approaches 1, which is the case where the value iteration algorithm and its variants suffer from slow convergence.

Table 1 goes here.

Example 2. *Consider MDPs with 500 states and up to 100 actions per state. The transition probability matrices are band matrix - matrix with non-zero elements only in a band centering*

around the diagonal of the matrix - with a bandwidth varying from 100 to 450 (which gives us the density of the matrix varying from 20% to 90%). When the density is set to 100%, Example 2 becomes identical to Example 1. The transition probabilities inside the band were generated using a uniform random number generator. The discount factor is set to 0.9, 0.98, and 0.995, and the tolerance used in the stopping condition is $\varepsilon = 10^{-3}$.

The computational results are presented in Table 2. The general trend in Example 2 is similar to that in the earlier example except for the acceleration being less dramatic. The maximum acceleration in terms of the CPU time is observed when the discount factor is 0.995 and the density is 80%, and PAVI accelerates the convergence 217 times over Jacobi value iteration. Similar to Example 1, the PAVI outperforms LAVI, both operators perform best when combined with the standard value iteration, and both accelerators perform better as the discount factor approaches 1 and the density approaches 100%.

Let us now present the brief analysis of the above numerical results. Based on Example 1 and Example 2, we can conclude that PAVI generally performs better than LAVI, and that the acceleration from PAVI is especially beneficial when it is combined with the standard value iteration and Jacobi methods. LAVI exhibits a relatively minor acceleration with these two methods and shows stronger performance when it is combined with Gauss-Seidel and Gauss-Seidel-Jacobi algorithm. We propose the the following explanation to this behavior. As one can notice, the impact of the projection operator is more significant when the Markovian operator moves the points deeper inside the set V rather than closer to fixed point. Because of this, combining the projection operator with the standard VI and Jacobi

VI is more advantageous than combining it with Gauss-Seidel and Gauss-Seidel-Jacobi VI. Moreover, it is assumed that the higher the density of the transition probability matrix the deeper inside of the set V the point will be moved by VI in any of the above forms. This assumption is related to the result of Lemma 2.2, where fully dense matrices are the limiting case of the dense matrices. One can see, especially from results in Table 2, the denser the transition probability matrix, the better the performance of PAVI combined with standard and Jacobi VI. One more remark should be made.

Remark 3.1. Notice that in some cases it turns out that PAVI+GSJ requires significantly more iterations than PAVI+GS. The reason is that the coordinate $|S|$ of $u = T_{GSJ}v$ is expressed in terms of u_j , $j < |S|$. Therefore for a certain $a \in A(|S|)$ we have the equality

$$u_{|S|} = \left[r(i, a) + \lambda \sum_{j < |S|} p_{|S|,j}(a) u_j \right] / \left[1 - \lambda p_{|S||S|}(a) \right],$$

which easily implies that $u \in \partial V$. Therefore, though it is not guaranteed, it is possible that $PT_{GSJ}v = T_{GSJ}v$ for all $v \in V$.

On the other hand, one can notice that Gauss-Seidel and Gauss-Seidel-Jacobi VI usually converge faster than the standard VI and Jacobi VI, but they iterate points closer to facets of set V , which reduces the impact of using projection operators. As suggested by geometry of set V and supported by the numerical examples, combining Gauss-Seidel and Gauss-Seidel-Jacobi VI with a linear extension operator is more advantageous than combining standard VI and Jacobi VI with it.

For almost all of the cases in Table 1, the combinations of PAVI + S and PAVI + J are the best combinations; however, for Table 2 one can see that for cases with sparse transition

probability matrices and λ close to 1, the combinations LAVI + GS and LAVI + GSJ are more advantageous. The numerical studies show that combinations of PAVI + S and PAVI + J perform better when the transition probability matrices are relatively dense (10% or more), while for sparse matrices the combinations LAVI + GS and LAVI + GSJ may perform better. For very sparse matrices (0.1% or less) the performance of all variants of GAVI is relatively poor.

In general, the acceleration tends to be more dramatic as the density increases and as the discount factor approaches 1. This is encouraging, since the standard value iteration algorithm and its variants have been known to suffer from slow convergence when the discount factor is close to 1 and requires more computation as the transition probability matrix becomes denser. Therefore, our accelerators will perform excellently when they are needed the most.

3.2 Computational Complexity and Savings

We now present the computational cost of the proposed operators. For the standard VI, when the transition probability matrices are fully dense, each iteration will take $C|S|^2$ (where C is the average number of actions per state) multiplications and divisions. With sparse transition probability matrices, this number can be estimated as $NC|S|$ (where N is the average number of non-zero entries per row of the transition probability matrices).

The additional effort required in GAVI is due to the acceleration operator used in **Step 1** of GAVI. Both accelerators require the computation of $\sum_j p_{ij}(a)Tw_j^{n-1}$ for all $i \in I$ for

all $a \in A(i)$ in n -th iteration of GAVI. Notice that we will have to know $\sum_j p_{ij}(a)w_j^n$ in the next iteration in order to compute Tw^n . For example, for PAVI $w^n = \alpha^*Tw^{n-1}$ and $\sum_j p_{ij}(a)w_j^n = \alpha^* \sum_j p_{ij}(a)Tw_j^{n-1}$. Therefore, we can store $\sum_j p_{ij}(a)Tw_j^{n-1}$ between iterations to avoid redundant computation. A similar approach can be applied to the three variants of acceleration operators studied in this paper. Therefore, each iteration of GAVI requires $C|S||S+1|$ multiplication and division, which is just slightly more than that of standard value iteration.

From the above we can draw the following conclusion: the additional computation due to the accelerating operators is marginal. Though it varies among different problem instances, the average additional computation per iteration observed in 54 instances from Example 1 and Example 2, each of which is solved using 12 different approaches, is 12% with PAVI and 15% with LAVI.

4 The Expected Total Reward and Other MDPs

In this section we will show that GAVI discussed in Section 2 can also be used with other types of MDP: MDPs with the expected total reward criterion, semi-Markov decision processes, and continuous-time MDP.

Consider an infinite horizon MDP with expected total reward criterion. One can notice that both the coordinate translation and the rewards adjustment described in Remark 2.3 cannot be applied to this model. This is because of $\lambda = 1$ for the coordination translation and the non-zero reward at absorbing states for the reward adjustment. Therefore, the proposed

techniques are applicable only to positive models (and also to negative models with trivial changes in the definition of the acceleration operators).

Recall that the value iteration algorithm for MDP with expected total reward criterion is based on successive application of an operator L to a vector $v \in \mathbb{R}^{|S|}$ [7],

$$(Lv)_i = \max_{a \in A(i)} \left\{ r(i, a) + \sum_j p_{ij}(a) v_j \right\}. \quad (12)$$

Since the operator L in Equation (12) is not a contraction mapping, the convergence of successive approximation algorithms using the operator L is not guaranteed. However, with v^0 satisfying the conditions $0 \leq v^0 \leq v^*$ or $v^* \leq v^0$, the sequence $\{v^n\}_{n=0}^\infty$ converges monotonically to v^* [7].

The LP formulation equivalent to an MDP with expected total reward criterion is given as follows:

$$\min \left\{ \sum_i v_i \mid v_i - \sum_j p_{ij}(a) v_j \geq r(i, a), \forall i \in S, \forall a \in A(i), v \in \mathbb{R}^{|S|} \right\}, \quad (13)$$

where v^* , the optimal solution of the LP, yields the fixed point of the MDP. Analogous with the discounted MDP considered in Section 1, the feasible set W of the LP in Equation (13) can be described as follows:

$$W = \{v \in \mathbb{R}^{|S|} \mid v \geq Lv\}. \quad (14)$$

The following Lemma states that the same approaches as introduced in Section 2 are applicable to MDPs with the total expected reward.

Lemma 4.1. *W is invariant under L . That is, $LW \subset W$.*

With the invariance of W under L , not only GAVI(General Accelerated Value Iteration) algorithm but also all of its variants can be applied directly to MDPs with the expected total reward criterion.

Remark 4.1. Jacobi and Gauss-Seidel-Jacobi variants of the value iteration algorithm are no longer valid for MDPs with the expected total reward criterion.

The value iteration algorithm for MDPs with the expected total reward has been known for its very slow convergence. Our acceleration operators, which improve the efficiency by an increasingly margin as the discount factor approaches 1, are an attractive option for MDPs with the expected total reward, which can be seen as MDPs with the discounted reward with a discount factor 1. Example 3 below confirms this speculation.

Example 3. *Consider an MDP with 5 states and up to 5 actions per state. Let one of the states be an absorbing state with zero reward. The standard value iteration takes 293 iterations, while our acceleration value iteration with Projective Operator takes only 15 iterations before meeting the stopping condition ($\varepsilon = 10^{-3}$).*

Now we will make a short remark about semi-Markov and continuous-time decision process. It is widely known that discounted infinite-horizon semi-Markov decision processes and continuous-time MDPs can be transformed into models similar to a discrete time discounted model with rewards $r(i, a)$ depending only on state at decision epoch and action [6, 7]. Therefore, our acceleration operations can be used for these types of MDPs after they are converted into discrete time MDPs with the total expected discounted reward.

5 Conclusions

Inspired by the monotone behavior of the contraction mapping operator used in the value iteration algorithm within the feasible set of the linear programming problem equivalent to the given MDP, we propose a class of operators that can be used in combination with the standard contraction mapping and its variants, such as Jacobi, Gauss-Seidel, and Gauss-Seidel-Jacobi methods, to improve the computational efficiency. Two acceleration operators, Projective Operator and Linear Extension Operator, are particularly proposed and combined into the standard value iteration algorithm and its variants. The savings due to the acceleration have been dramatic and the maximum savings is up to 607 time faster than the case without our accelerating operator. The numerical studies show that combinations of PAVI + S and PAVI + J perform better when the transition probability matrices are relatively dense (10% or more), while for sparse matrices the combinations LAVI + GS and LAVI + GSJ may perform better. It is especially interesting to mention that the savings become more dramatic when encountering problems for which the standard value iteration algorithm suffers from slow convergence (when the discount factor approaches 1 and when the transition probability matrix becomes dense). The strong performance with the discount factor close to 1 can be of special interest to those who are investigating Blackwell Optimality, which assures that a Blackwell optimal policy is optimal for all discount factors $\lambda_b < 1$ close enough to 1 [1, 10].

A Proofs

Lemma A.1.

(i) If $u \geq v$, then $Tu \geq Tv$, $T_J u \geq T_J v$, $T_{GS} u \geq T_{GS} v$, and $T_{GSJ} u \geq T_{GSJ} v$.

(ii) If $u > v$, then $Tu > Tv$, $T_J u > T_J v$, $T_{GS} u > T_{GS} v$, and $T_{GSJ} u > T_{GSJ} v$.

Proof of Lemma A.1. Let us first prove that $u \geq v$ implies $Tu \geq Tv$.

$$Tu_i = \max_{a \in A(i)} \left\{ r(i, a) + \lambda \sum_j p_{ij}(a) u_j \right\} \geq \max_{a \in A(i)} \left\{ r(i, a) + \lambda \sum_j p_{ij}(a) v_j \right\} = Tv_i \text{ for all } i \in S.$$

For part (ii) the inequality can be simply replaced with a strict inequality. The same proof applies for $T_J u \geq T_J v$. Let $w = T_{GS} u$ and $\xi = T_{GS} v$. Then $w_1 = T_{GS} u_1 = Tu_1 \geq Tv_1 = \xi_1$ for all $i \in S$. By induction, assuming that $w_k \geq \xi_k$ for all $k < i$, we get for $j = i$

$$\begin{aligned} w_i &= \max_{a \in A(i)} \left(r(i, a) + \lambda \sum_{j < i} p_{ij}(a) w_j + \lambda \sum_{j \geq i} p_{ij}(a) u_j \right) \\ &\geq \max_{a \in A(i)} \left(r(i, a) + \lambda \sum_{j < i} p_{ij}(a) \xi_j + \lambda \sum_{j \geq i} p_{ij}(a) v_j \right) = (T_{GS} v)_i = \xi_i. \end{aligned}$$

This proof can be trivially modified for $T_{GSJ} u \geq T_{GSJ} v$, $T_{GS} u > T_{GS} v$, and $T_{GSJ} u > T_{GSJ} v$. □

Remark A.1. Notice that proof of Lemma A.1 is good even when $\lambda = 1$.

Proof of Lemma 2.1. Let $v \in V$ and $u = Tv$. By definition of set V , $u = Tv \leq v$. By monotonicity shown in Lemma A.1, $Tu \leq Tv = u$. Thus, $u \in V$. □

Proof of Theorem 2.1. Condition (A) is satisfied trivially since $\alpha v \in V$ for any $v \in V$ by the definition of Z given in (5). Now we have to show that Z satisfies condition (B). We know

$\alpha = 1$ is feasible to the linear program (5) since $v \in V$ (or $Tv \leq v$). Since $\sum_i v_i \geq 0$ due to $r(i, a) \geq 0, \forall i, a$, we have $\alpha^* \leq 1$. Therefore, $Zv = \alpha^* v \leq v$. $\square$

Proof of Lemma 2.2. Suppose that the transition probability matrix is fully dense (i.e., $p_{ij}(a) > 0, \forall i, j, a$). Then if $v \geq u = Tv$ and $v \neq v^*$, where v^* is the fixed point of T , there exists k such that $v_k > u_k$. As a result,

$$\begin{aligned} Tu_i &= \max_{a \in A(i)} \left\{ r(i, a) + \lambda \sum_{j \neq k} p_{ij}(a) u_j + \lambda p_{ik}(a) u_k \right\} \\ &< \max_{a \in A(i)} \left\{ r(i, a) + \lambda \sum_{j \neq k} p_{ij}(a) v_j + \lambda p_{ik}(a) v_k \right\} = v_i \text{ for all } i \in S. \end{aligned}$$

$\square$

Proof of Lemma 2.3. Let $v \in \text{int}(V)$ and $u = Tv$. By definition of $\text{int}(V)$, $u = Tv < v$. By monotonicity shown in Lemma A.1, $Tu < Tv = u$. Thus, $u \in \text{int}(V)$. $\square$

Proof of Theorem 2.2. For $v \in V$, $Z(v) = v + \alpha^*(Tv - v)$, where α^* is an optimal solution to the linear program in 6. Since $v + \alpha^*(Tv - v)$ is feasible to the linear program, we have $T(v + \alpha^*(Tv - v)) \leq v + \alpha^*(Tv - v)$. This suffices Condition (A). By $Tv = u \in V$, $\alpha = 1$ is feasible. Since $Tv \leq v$ and $\alpha = 1$ is feasible, $\alpha^* > 0$. Hence, $Zv \leq v$ and Condition (B) is satisfied. $\square$

Proof of Lemma 2.4. This proof is similar to the proofs of Lemma 2.1 and 2.3. $\square$

Proof of Lemma 2.5. First let's show that $V_J \in V$. From (7), $v^{n+1} = T_J v^n$, where

$$\begin{aligned} v_i^{n+1} &= \max_{a \in A(i)} \left\{ \left[r(i, a) + \lambda \sum_{j \neq i} p_{ij}(a) v_j^n \right] / [1 - \lambda p_{ii}(a)] \right\} \\ &\geq \left[r(i, a) + \lambda \sum_{j \neq i} p_{ij}(a) v_j^n \right] / [1 - \lambda p_{ii}(a)], \forall a \in A(i), \end{aligned}$$

which then implies

$$v_i^{n+1} - v_i^{n+1} \lambda p_{ii}(a) \geq r(i, a) + \lambda \sum_{j \neq i} p_{ij}(a) v_j^n$$

or

$$v_i^{n+1} \geq r(i, a) + \lambda \sum_j p_{ij}(a) v_j^n.$$

Therefore, $V_J \subset V$. Repeating the same steps and moving backward it is easy to show that $V \subset V_J$. Similarly we can show $V_{GS} = V_{GSJ}$. In order to prove inclusion $V \subset V_{GS}$, it is sufficient to show that if $v \geq T v$, then $v \geq T_{GS} v$. For $v \in V$, let $u = T_{GS} v$ and $w = T v$. Then, $w_j \leq v_j$ for all j and $u_1 = w_1$. Assume that $u_k \leq w_k$ for all $k < i$, then

$$\begin{aligned} u_i &= \max_{a \in A(i)} \left(r(i, a) + \lambda \sum_{j < i} p_{ij}(a) u_j + \lambda \sum_{j \geq i} p_{ij}(a) v_j \right) \\ &\leq \max_{a \in A(i)} \left(r(i, a) + \lambda \sum_{j < i} p_{ij}(a) w_j + \lambda \sum_{j \geq i} p_{ij}(a) v_j \right) \\ &\leq \max_{a \in A(i)} \left(r(i, a) + \lambda \sum_{j < i} p_{ij}(a) v_j + \lambda \sum_{j \geq i} p_{ij}(a) v_j \right) = (T v)_i = w_i. \end{aligned}$$

By induction, $w \geq u$, implying $v \geq T v = w \geq u = T_{GS} v$. □

Proof of Lemma 2.6. For $v \in V_{GS}$, let $u = T_{GS} v$. By Lemma A.1, $v \geq T_{GS} v = u$. By replacing “ $\max_{a \in A(i)}$ ” by inequalities, similar to the argument used in the proof of Lemma 2.5,

and by $v \geq u$, we have

$$\begin{aligned} u_i &\geq r(i, a) + \lambda \sum_{j < i} p_{ij}(a)u_j + \lambda \sum_{j \geq i} p_{ij}(a)v_j \text{ for all } i \in I \text{ for all } a \in A(i) \\ &\geq r(i, a) + \lambda \sum_{j < i} p_{ij}(a)u_j + \lambda \sum_{j \geq i} p_{ij}(a)u_j \text{ for all } i \in I \text{ for all } a \in A(i), \end{aligned}$$

which is equivalent to $u \geq Tu$, or $u \in V$. If $v \in V_{GSJ}$, then letting $u = T_{GSJ}$ by similar argument we get $u \geq T_J u$. Since $V_J = V$, $u \in V$. $\square$

Proof of Theorem 2.3. By monotonicity shown in Lemma A.1, $T_J V_J \subset V_J$. Therefore, by $V = V_J$ in Lemma 2.5, $T_J V \subset V$. By Lemma 2.5 and Lemma 2.6,

$$T_{GS} V \subset T_{GS} V_{GS} \subset V \text{ and } T_{GSJ} V \subset T_{GSJ} V_{GSJ} \subset V.$$

$\square$

Proof of Lemma 4.1. The proof is similar to proofs of Lemma 2.1 and 2.3. $\square$

Acknowledgement

We express our deepest condolences to the late Dr. Dmitry Khmelev, who was a postdoctoral fellow in the Department of Mathematics at University of Toronto before he passed away in 2004.

References

- [1] D. Blackwell. Discrete dynamic programming. *Annals of Mathematical Statistics*, 33:719–726, 1962.

- [2] D. de Farias and B. Van Roy. The linear programming approach to approximate dynamic programming. *Operations Research*, 51(6):850–856, 2003.
- [3] C. Derman. *Finite State Markovian Decision Processes*. Academic Press, New York, 1970.
- [4] M. Herzberg and U. Yechiali. Accelerating procedures of the value iteration algorithm for discounted Markov decision process, based on a one-step lookahead analysis. *Operations Research*, 42(5):940–946, 1994.
- [5] M. Herzberg and U. Yechiali. A k-step look-ahead analysis of value iteration algorithm for Markov decision processes. *European Journal of Operational Research*, 88:622–636, 1996.
- [6] S. A. Lippman. Applying a new device in the optimization of exponential queuing systems. *Operations Research*, 23(4):687–710, 1975.
- [7] M. L. Puterman. *Markov Decision Processes: Discrete Stochastic Dynamic Programming*. John Wiley & Sons, Inc, New York, 1994.
- [8] P. Schweitzer and A. Seidmann. Generalized polynomial approximation in Markovian decision processes. *Journal of Mathematical Analysis and Applications*, 110:568–582, 1985.
- [9] M. A. Trick and S. E. Zin. Spline approximations to value functions. *Macroeconomic Dynamics*, 1(1):255–277, 1997.

- [10] A. F. Veinott, Jr. Discrete dynamic programming with sensitive discount optimality criteria. *Annals of Mathematical Statistics*, 40:1635–1660, 1969.

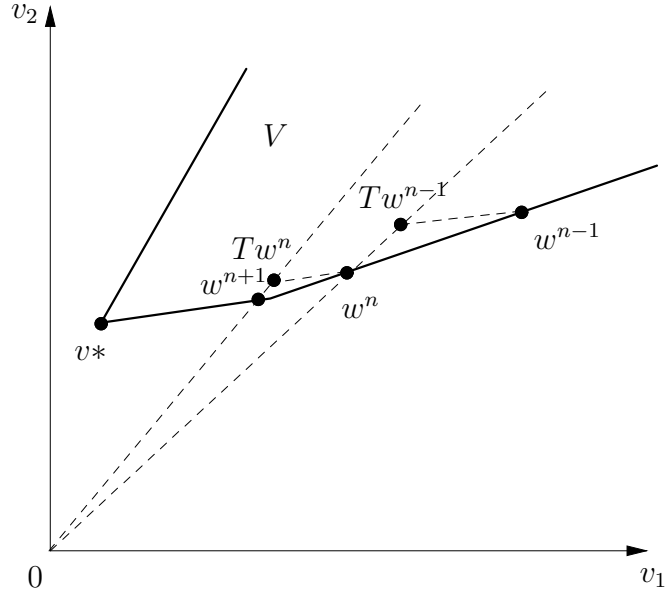


Figure 1: Projective AVI

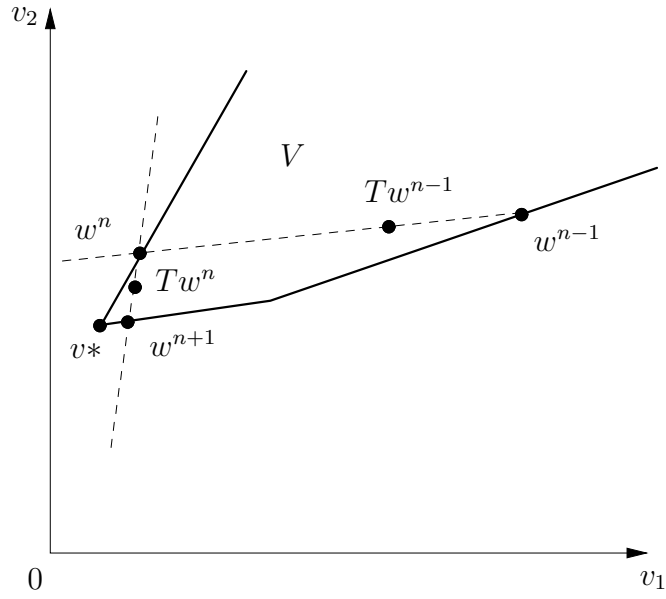


Figure 2: Linear AVI

λ		0.9			0.98			0.995		
Dens. [†]	VI	None [‡]	PAVI [‡]	LAVI [‡]	None [‡]	PAVI [‡]	LAVI [‡]	None [‡]	PAVI [‡]	LAVI [‡]
100	S	201 / 49	7 / 2	57 / 15	1164 / 287	8 / 2	339 / 91	5104 / 1257	8 / 2	1504 / 397
	J	201 / 56	7 / 2	56 / 17	1163 / 324	8 / 3	339 / 102	5097 / 1427	8 / 2	1508 / 451
	GS	75 / 18	58 / 26	33 / 15	419 / 103	317 / 139	180 / 80	1818 / 449	1188 / 522	774 / 343
	GSJ	74 / 20	59 / 26	28 / 13	417 / 117	336 / 148	110 / 50	1811 / 503	1485 / 653	379 / 169
90	S	201 / 47	7 / 1	58 / 15	1164 / 273	7 / 2	335 / 84	5104 / 1196	8 / 2	1498 / 377
	J	201 / 53	6 / 2	57 / 17	1163 / 308	7 / 2	336 / 95	5098 / 1355	8 / 2	1493 / 418
	GS	75 / 17	57 / 24	26 / 11	418 / 98	306 / 127	163 / 68	1817 / 427	1081 / 447	743 / 310
	GSJ	74 / 20	58 / 24	20 / 9	417 / 111	333 / 139	97 / 42	1810 / 478	1474 / 614	310 / 131
80	S	201 / 43	7 / 2	58 / 13	1164 / 248	8 / 1	342 / 78	5102 / 1081	9 / 2	1521 / 345
	J	201 / 48	7 / 2	57 / 15	1162 / 277	8 / 2	340 / 89	5095 / 1216	9 / 2	1504 / 393
	GS	75 / 16	56 / 21	32 / 13	418 / 89	275 / 101	180 / 68	1815 / 385	788 / 290	768 / 285
	GSJ	74 / 17	58 / 22	26 / 10	416 / 98	334 / 124	121 / 46	1808 / 429	1477 / 546	399 / 149
70	S	201 / 37	7 / 1	59 / 12	1163 / 223	8 / 1	348 / 70	5100 / 973	9 / 2	1530 / 310
	J	201 / 42	7 / 1	58 / 14	1162 / 246	8 / 1	345 / 77	5093 / 1080	9 / 2	1538 / 354
	GS	75 / 14	59 / 19	31 / 11	418 / 81	330 / 108	174 / 57	1815 / 342	1365 / 447	769 / 253
	GSJ	74 / 16	59 / 19	31 / 11	416 / 88	337 / 111	142 / 47	1807 / 382	1488 / 489	443 / 147
60	S	201 / 33	8 / 1	62 / 11	1163 / 190	9 / 1	356 / 62	5098 / 835	10 / 1	1558 / 272
	J	201 / 37	8 / 1	61 / 12	1161 / 211	9 / 2	353 / 70	5092 / 930	10 / 2	1549 / 304
	GS	74 / 12	60 / 17	33 / 9	417 / 71	342 / 95	108 / 31	1813 / 297	1510 / 419	418 / 117
	GSJ	74 / 13	60 / 17	33 / 9	416 / 75	341 / 96	106 / 30	1806 / 327	1505 / 421	441 / 125
50	S	201 / 31	8 / 1	62 / 10	1165 / 180	9 / 2	353 / 58	5106 / 789	9 / 2	1546 / 257
	J	201 / 34	8 / 1	61 / 11	1163 / 199	9 / 2	353 / 66	5098 / 873	9 / 1	1543 / 292
	GS	75 / 12	57 / 15	32 / 9	419 / 65	285 / 74	180 / 48	1820 / 281	855 / 222	788 / 208
	GSJ	74 / 13	59 / 15	32 / 9	417 / 72	336 / 87	108 / 29	1812 / 312	1486 / 387	322 / 86
40	S	201 / 28	8 / 1	62 / 9	1164 / 163	9 / 1	355 / 52	5105 / 715	10 / 1	1571 / 235
	J	201 / 31	8 / 1	61 / 9	1163 / 178	9 / 2	353 / 58	5099 / 784	10 / 2	1565 / 262
	GS	75 / 10	59 / 13	32 / 7	418 / 61	336 / 77	101 / 24	1816 / 255	1486 / 340	111 / 26
	GSJ	74 / 12	58 / 13	30 / 7	417 / 64	335 / 78	105 / 24	1810 / 277	1481 / 342	139 / 33
30	S	201 / 25	8 / 1	64 / 8	1164 / 145	9 / 2	358 / 48	5102 / 635	10 / 1	1584 / 210
	J	201 / 27	8 / 1	63 / 8	1162 / 157	9 / 1	356 / 55	5096 / 689	10 / 1	1580 / 221
	GS	74 / 9	58 / 12	32 / 7	418 / 52	334 / 66	82 / 16	1813 / 232	1479 / 291	113 / 23
	GSJ	74 / 10	58 / 12	32 / 7	416 / 56	333 / 66	71 / 15	1807 / 245	1473 / 292	134 / 27
20	S	201 / 21	8 / 1	64 / 7	1163 / 122	9 / 1	361 / 40	5101 / 534	10 / 1	1605 / 178
	J	201 / 22	8 / 1	63 / 8	1162 / 130	9 / 1	360 / 47	5093 / 574	10 / 1	1600 / 199
	GS	74 / 8	58 / 9	31 / 5	417 / 44	332 / 53	86 / 14	1813 / 190	1471 / 233	114 / 19
	GSJ	74 / 9	58 / 10	23 / 4	415 / 46	331 / 54	70 / 11	1804 / 201	1463 / 236	190 / 31

†: The density of the transition probability matrix (%).

‡: Two values in these columns correspond to the number of iterations and CPU time of the corresponding algorithm.

Table 1: The number of iterations and CPU time of the standard, Jacobi, Gauss-Seidel, and Gauss-Seidel-Jacobi value iteration algorithms with and without an accelerating operator applied to a family of MDPs from Example 1

λ		0.9			0.98			0.995		
Density [†]	VI	None [‡]	PAVI [‡]	LAVI [‡]	None [‡]	PAVI [‡]	LAVI [‡]	None [‡]	PAVI [‡]	LAVI [‡]
90	S	201 / 36	15 / 3	65 / 12	1164 / 209	20 / 4	385 / 75	5102 / 919	23 / 4	1711 / 336
	J	201 / 42	15 / 3	64 / 13	1162 / 244	20 / 4	384 / 79	5092 / 1081	23 / 5	1710 / 343
	GS	75 / 14	59 / 16	29 / 8	419 / 76	334 / 89	171 / 46	1818 / 327	1465 / 387	752 / 201
	GSJ	75 / 16	58 / 16	21 / 6	417 / 87	333 / 89	123 / 34	1815 / 382	1473 / 391	321 / 87
80	S	201 / 33	15 / 2	64 / 10	1164 / 179	22 / 3	378 / 63	5103 / 785	26 / 4	1678 / 282
	J	201 / 36	15 / 2	63 / 11	1162 / 209	22 / 4	377 / 69	5093 / 912	26 / 4	1679 / 298
	GS	75 / 12	56 / 13	33 / 8	419 / 65	252 / 58	173 / 40	1820 / 280	621 / 143	777 / 181
	GSJ	75 / 13	59 / 14	29 / 7	417 / 74	335 / 78	108 / 27	1816 / 328	1478 / 343	297 / 70
70	S	202 / 26	17 / 3	66 / 9	1164 / 152	26 / 4	392 / 56	5101 / 704	32 / 5	1746 / 247
	J	201 / 30	17 / 3	65 / 9	1161 / 175	26 / 4	391 / 58	5090 / 766	32 / 4	1745 / 251
	GS	75 / 9	58 / 11	32 / 7	420 / 55	278 / 56	175 / 36	1820 / 235	786 / 156	766 / 154
	GSJ	75 / 11	59 / 12	32 / 7	417 / 63	337 / 68	145 / 30	1812 / 274	1487 / 300	367 / 78
60	S	201 / 23	29 / 3	68 / 8	1163 / 124	47 / 6	398 / 47	5096 / 544	57 / 6	1766 / 207
	J	201 / 25	29 / 3	67 / 8	1160 / 144	47 / 5	399 / 48	5083 / 632	57 / 7	1767 / 209
	GS	75 / 8	56 / 9	32 / 6	419 / 44	226 / 37	182 / 30	1817 / 193	477 / 78	785 / 131
	GSJ	75 / 10	60 / 10	34 / 5	416 / 52	341 / 57	127 / 21	1809 / 225	1503 / 248	361 / 61
50	S	202 / 19	45 / 4	68 / 7	1163 / 110	80 / 8	396 / 42	5096 / 481	99 / 10	1756 / 185
	J	201 / 23	45 / 5	67 / 9	1160 / 127	80 / 9	396 / 49	5082 / 556	99 / 10	1759 / 210
	GS	76 / 7	57 / 9	31 / 5	419 / 40	251 / 39	162 / 25	1818 / 171	605 / 90	725 / 111
	GSJ	75 / 8	59 / 9	32 / 6	416 / 46	335 / 50	124 / 20	1806 / 207	1479 / 220	239 / 37
40	S	202 / 16	51 / 4	69 / 7	1163 / 93	108 / 9	400 / 35	5095 / 429	143 / 12	1765 / 155
	J	201 / 19	50 / 5	68 / 9	1159 / 106	108 / 10	399 / 40	5077 / 483	142 / 12	1767 / 173
	GS	76 / 6	56 / 7	32 / 4	420 / 33	236 / 29	179 / 23	1819 / 143	526 / 65	742 / 94
	GSJ	75 / 7	60 / 8	32 / 4	416 / 40	334 / 41	141 / 19	1806 / 168	1472 / 184	235 / 30
30	S	203 / 13	62 / 4	69 / 5	1163 / 73	170 / 12	399 / 28	5094 / 318	252 / 17	1763 / 123
	J	202 / 14	62 / 4	68 / 6	1158 / 83	169 / 13	398 / 32	5071 / 365	251 / 18	1765 / 136
	GS	77 / 5	57 / 6	35 / 3	421 / 26	235 / 24	174 / 18	1823 / 114	514 / 51	769 / 79
	GSJ	76 / 5	60 / 6	35 / 4	416 / 31	333 / 34	159 / 16	1801 / 129	1466 / 148	408 / 21
20	S	204 / 9	76 / 3	68 / 3	1163 / 52	283 / 13	400 / 21	5085 / 226	525 / 25	1772 / 89
	J	202 / 10	75 / 4	68 / 3	1155 / 59	280 / 15	399 / 23	5052 / 258	520 / 27	1767 / 101
	GS	78 / 4	57 / 4	36 / 3	422 / 18	216 / 16	182 / 13	1823 / 81	420 / 31	768 / 59
	GSJ	77 / 4	60 / 4	34 / 2	414 / 22	330 / 25	149 / 12	1789 / 93	1448 / 107	298 / 23
10	S	204 / 5	82 / 3	69 / 2	1162 / 32	361 / 11	400 / 13	5065 / 138	1091 / 31	1772 / 56
	J	201 / 6	80 / 3	68 / 2	1147 / 34	355 / 13	398 / 15	4997 / 151	1071 / 37	1767 / 63
	GS	80 / 3	57 / 2	37 / 2	430 / 11	248 / 12	189 / 10	1838 / 49	674 / 32	796 / 40
	GSJ	78 / 3	61 / 3	37 / 2	414 / 13	332 / 16	164 / 8	1770 / 54	1438 / 69	429 / 22

†: The density of the transition probability matrix (%).

‡: Two values in these columns correspond to the number of iterations and CPU time of the corresponding algorithm.

Table 2: The number of iterations and CPU time of the standard, Jacobi, Gauss-Seidel, and Gauss-Seidel-Jacobi value iteration algorithms with and without an accelerating operator applied to a family of MDPs from Example 2